

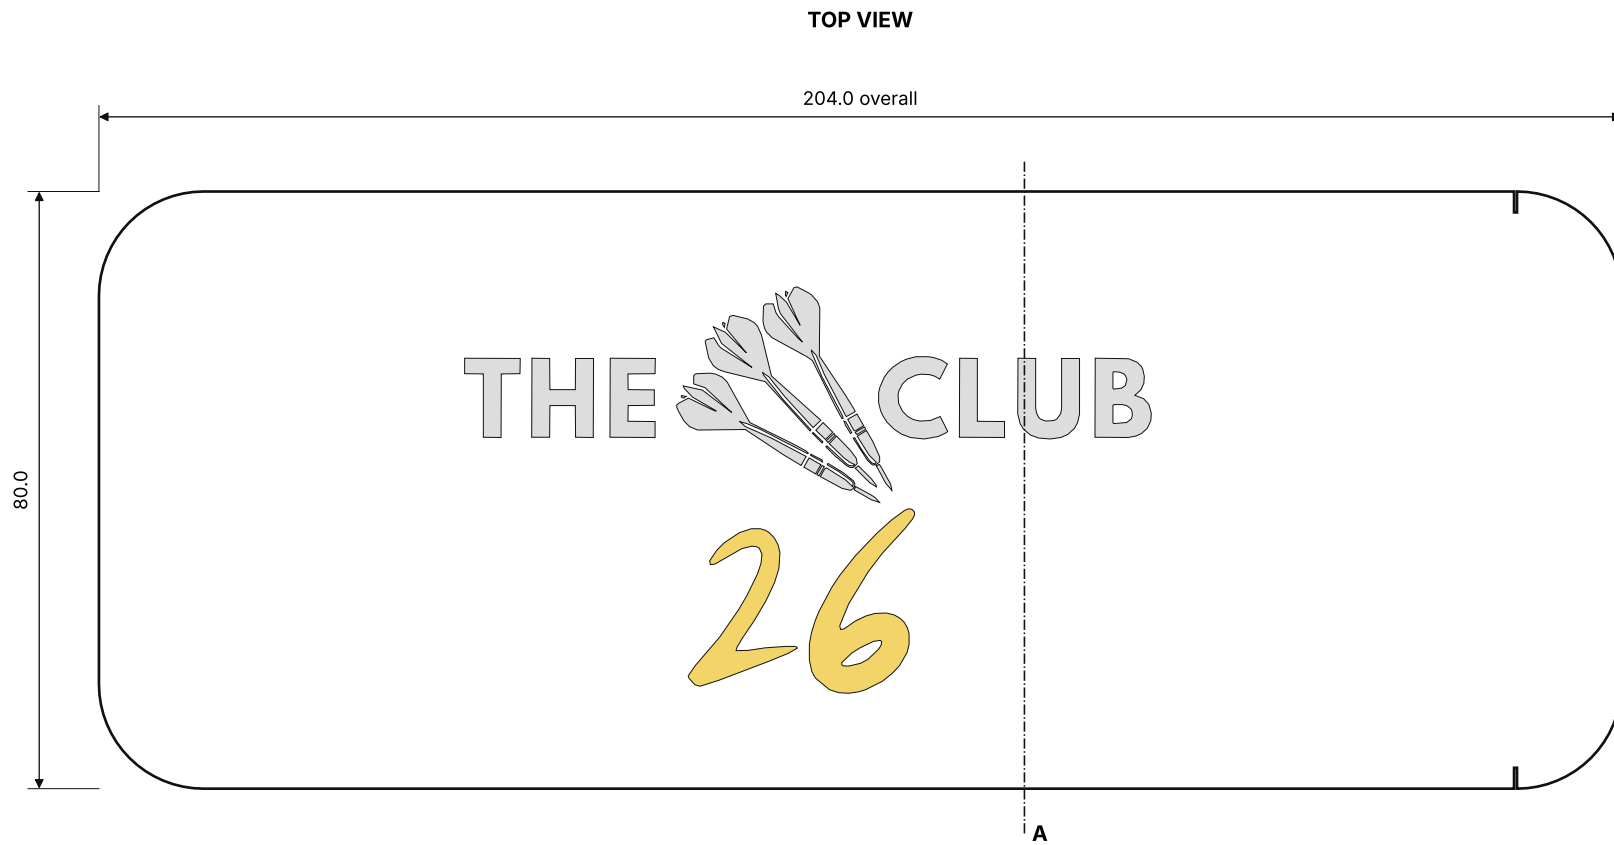
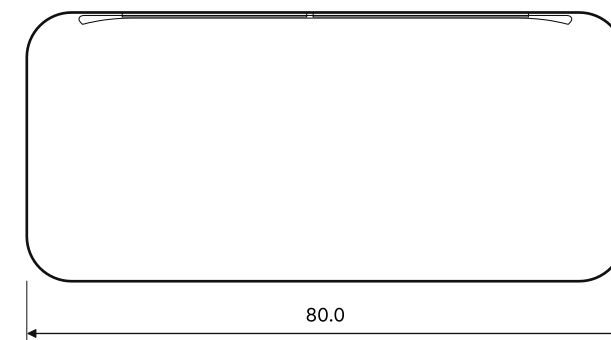


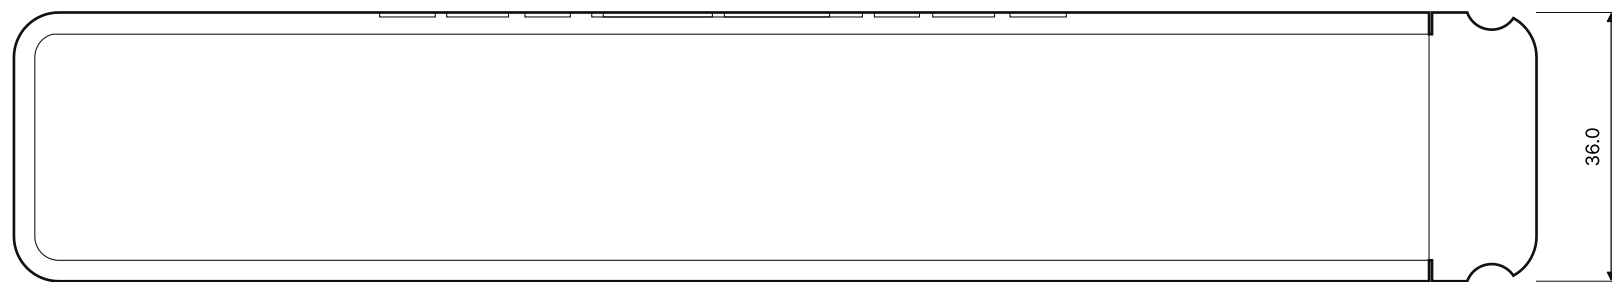

SECTION A-A (CRADLE RIB, $x = +22$), WITH REFERENCE DARTS

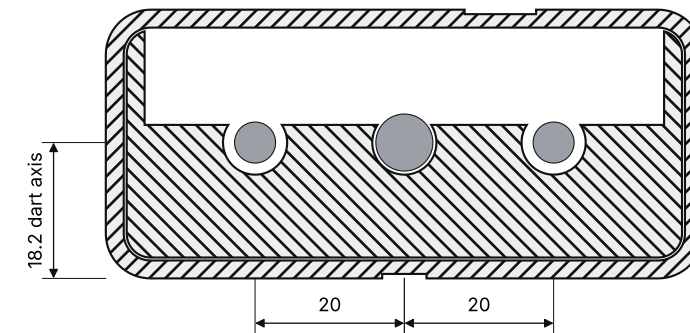

FRONT VIEW

RIGHT SIDE VIEW

Unless stated: general tolerance ± 0.3 mm (FDM). Do not scale. Black PETG or PLA. Draft for review, not yet test printed.

THE 26 CLUB | DRAWER AND SLEEVE


GENERAL ARRANGEMENT

DRG TCC-DC-002
SHEET 1 OF 6 REV C (DRAFT)


SCALE 1:1
UNITS mm

12 OCT 2026
3RD ANGLE


TOP VIEW, LOGO INLAID 0.6 FLUSH

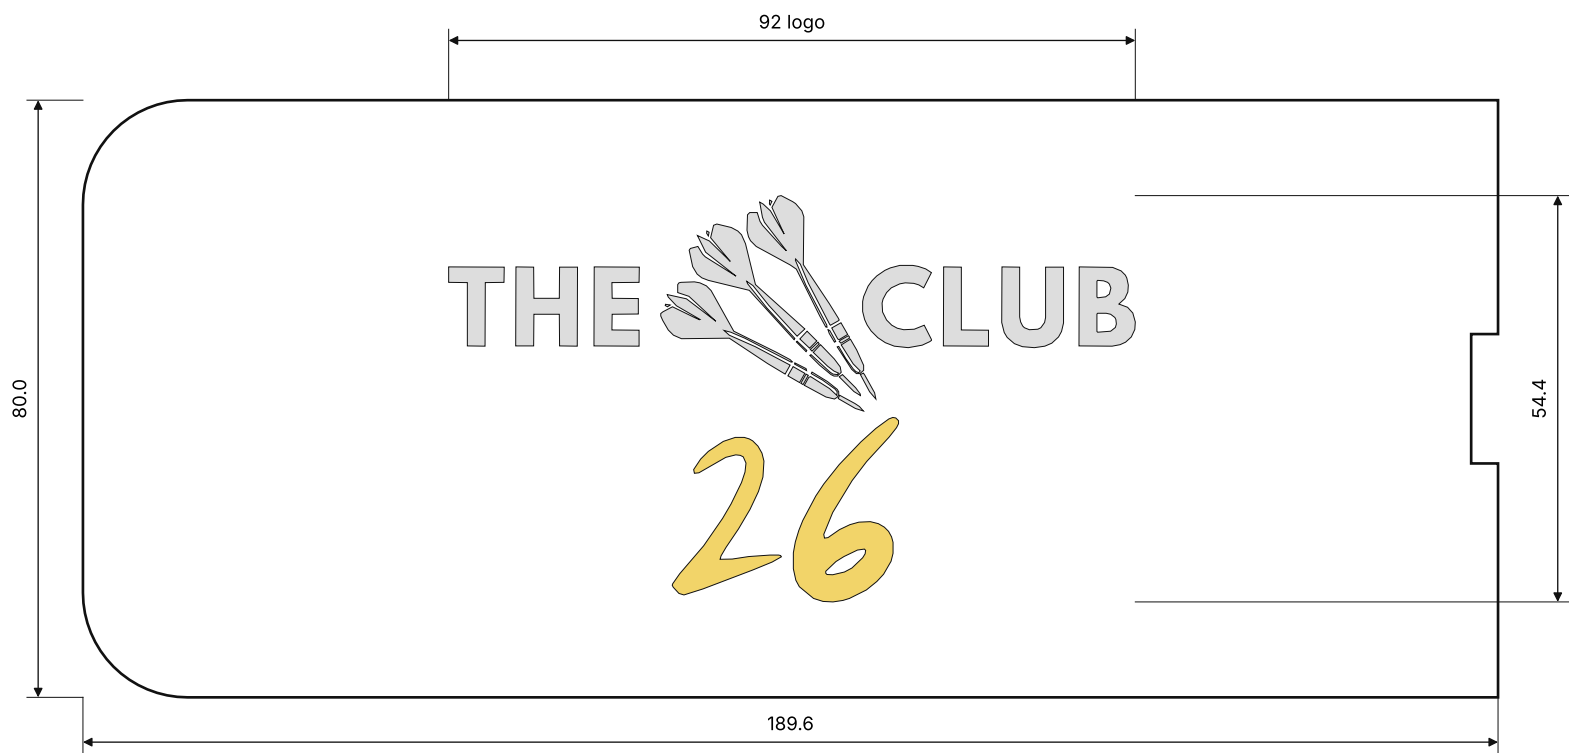

PLAN SECTION AT z 18.0

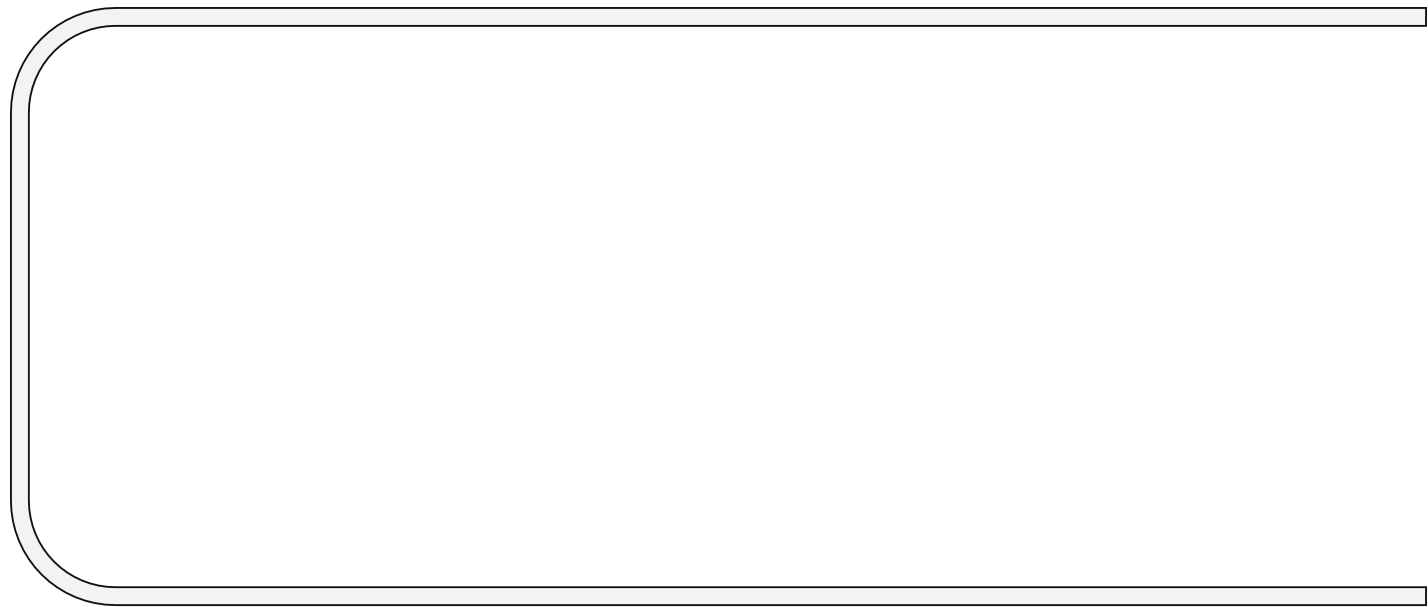

UNDERSIDE (0.6:1)

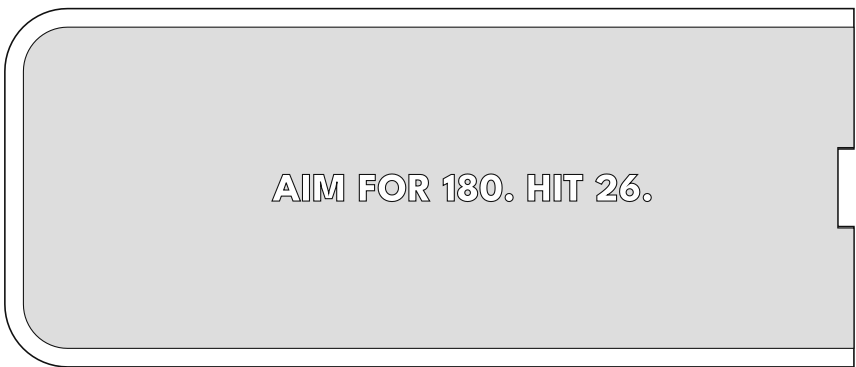

"AIM FOR 180. HIT 26." debossed 0.6 deep,
League Spartan 800, 9 pt. Reads correctly turned over.

Unless stated: general tolerance +/-0.3 mm (FDM). Do not scale. Black PETG or PLA. Draft for review, not yet test printed.

THE 26 CLUB | DRAWER AND SLEEVE

PART 1: SLEEVE

DRG TCC-DC-002
SHEET 2 OF 6 REV C (DRAFT)


SCALE 1:1
UNITS mm

12 OCT 2026
3RD ANGLE

TOP VIEW




PLAN SECTION AT z 6.2

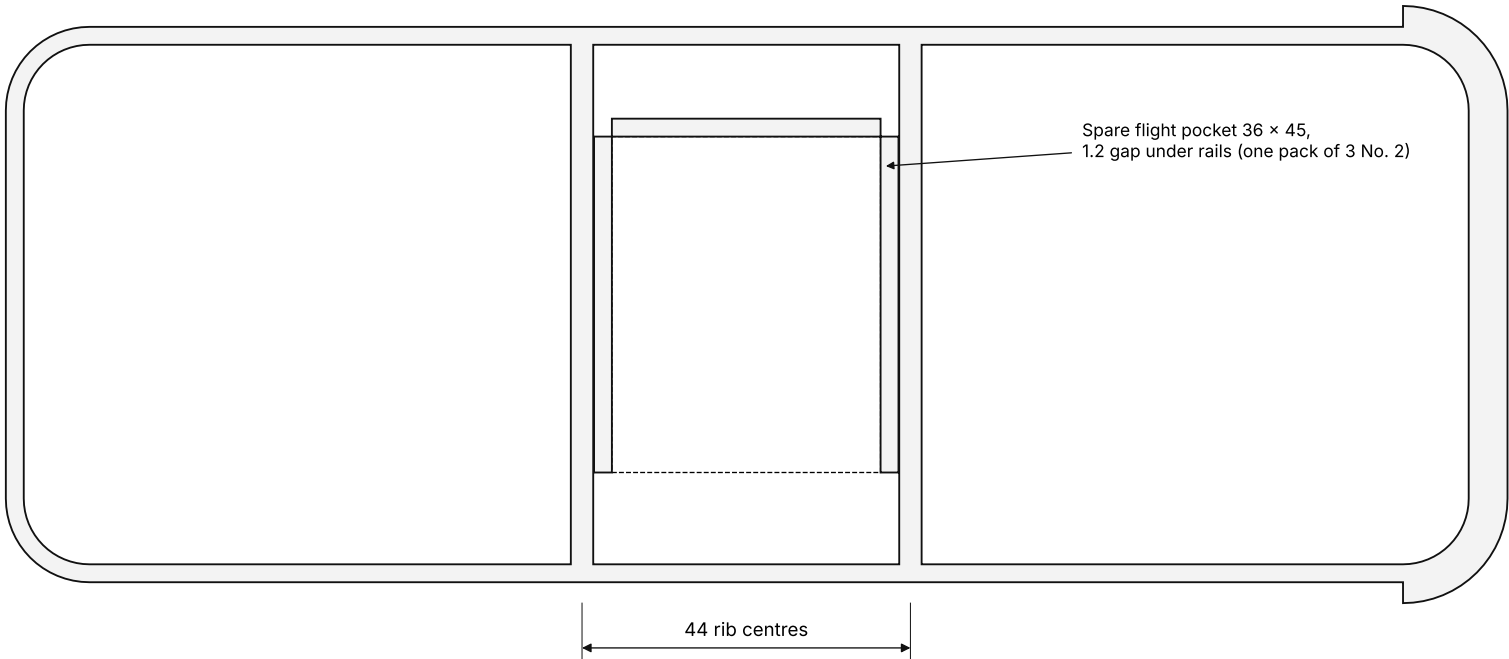

Unless stated: general tolerance +/-0.3 mm (FDM). Do not scale. Black PETG or PLA. Draft for review, not yet test printed.


THE 26 CLUB DRAWER AND SLEEVE		
PART 2: DRAWER		
DRG TCC-DC-002	SCALE 1:1	12 OCT 2026
SHEET 3 OF 6 REV C (DRAFT)	UNITS mm	3RD ANGLE

DARTS IN PLACE, PLAN (1:1)

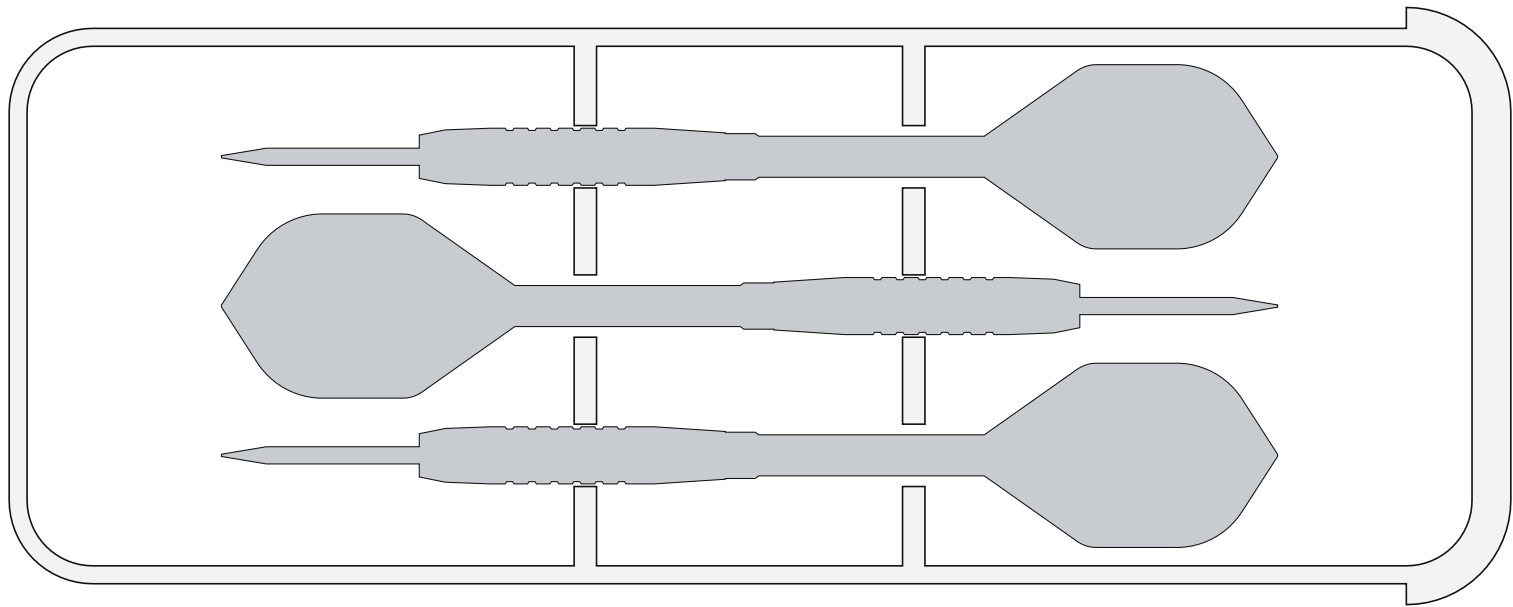

Middle dart stored reversed so the flights clear each other. The case also takes darts up to 180 long overall.

REFERENCE DART (1:1)

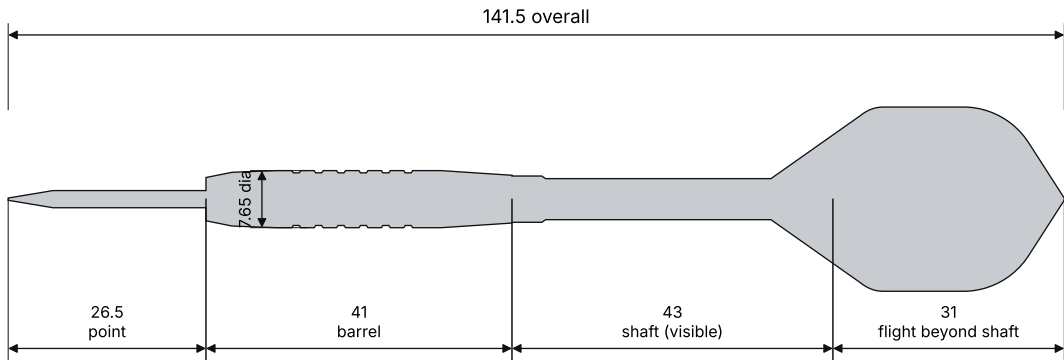


Target Phil Taylor Power 9Five Gen 8, 24 g: barrel 41.0 long x 7.65 dia (retailer figures). 32 mm steel point, about 5.5 inside the barrel. Medium 2BA shaft, 48 listed, 43 assumed visible. No. 2 flight 43 long, 12 assumed inside the shaft slots.

Unless stated: general tolerance +/-0.3 mm (FDM). Do not scale. Black PETG or PLA. Draft for review, not yet test printed.


THE 26 CLUB DRAWER AND SLEEVE		
DART FIT, REFERENCE DART		
DRG TCC-DC-002	SCALE 1:1	12 OCT 2026
SHEET 4 OF 6 REV C (DRAFT)	UNITS mm	3RD ANGLE

DETAIL C, MOUTH AND END CAP (2:1, SECTION y = 0)

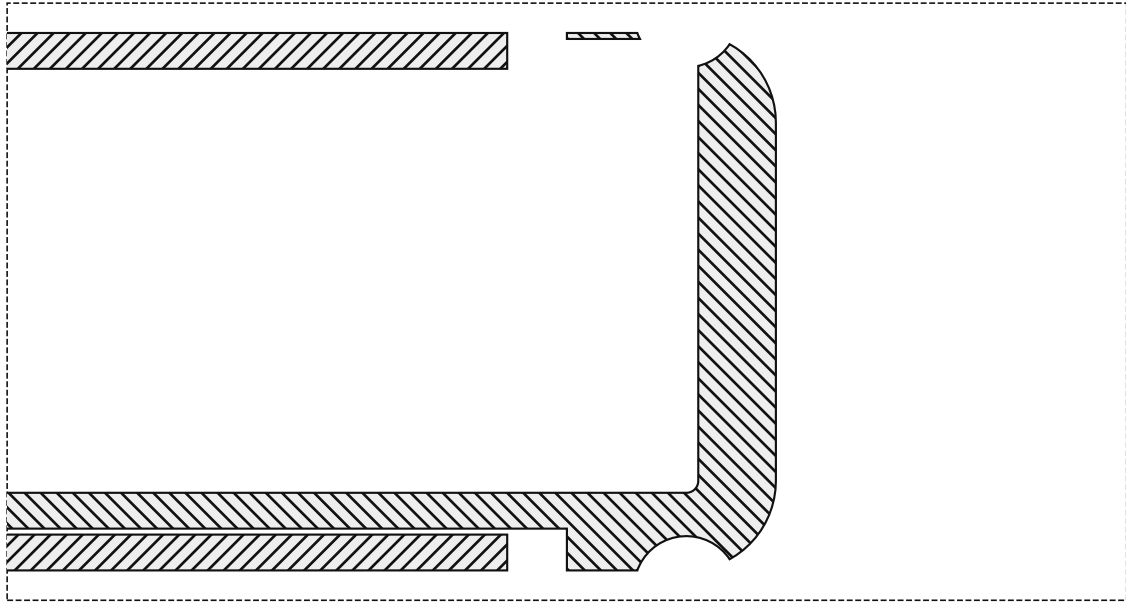

Thumb scoops R9 top and bottom at the mouth. Finger grooves R3.5 across the rounded end cap.
Drawer clearance 0.4 all round. The end cap is the rounded end of the case.

DETAIL F, CLIP RIB (2:1)

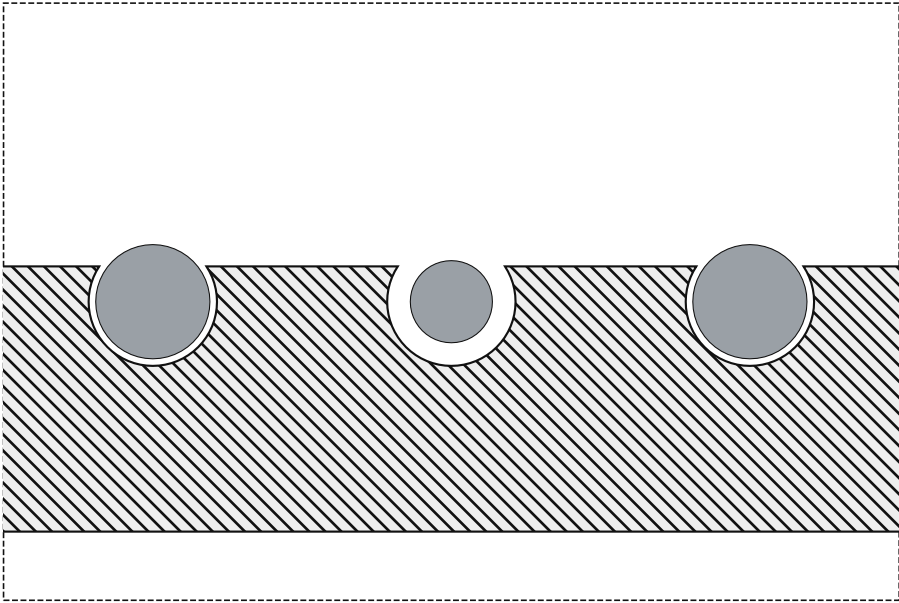

Notch R4.3, mouth 6.6 wide: barrels from 7.0 to 8.6 dia click in.

Unless stated: general tolerance +/-0.3 mm (FDM). Do not scale. Black PETG or PLA. Draft for review, not yet test printed.

THE 26 CLUB DRAWER AND SLEEVE		
DETAILS		
DRG TCC-DC-002	SCALE 1:1	12 OCT 2026
SHEET 5 OF 6 REV C (DRAFT)	UNITS mm	3RD ANGLE

PARTS LIST

Item	Part	File	Material / colour	Solid cm3
1	Sleeve	the26club-dart-case-b-drawer-and-sleeve-sleeve.stl	PETG or PLA, black	100.2
2	Drawer	the26club-dart-case-b-drawer-and-sleeve-drawer.stl	PETG or PLA, black	84.2
3	Logo inlay, wordmark + darts	the26club-dart-case-b-drawer-and-sleeve-logo-white.stl	Same type, white	0.3
4	Logo inlay, 26	the26club-dart-case-b-drawer-and-sleeve-logo-gold.stl	Same type, gold (near #F2D469)	0.1

Logo part and inlays also supplied aligned as the26club-dart-case-b-drawer-and-sleeve-sleeve-multicolour.3mf.

PRINT SETTINGS (STARTING POINT, NOT YET TESTED)

Part	Orientation	Supports
Sleeve + logo	Floor on bed, logo on last 3 layers	Inside the channel only (75 mm roof)
Drawer	Floor on bed	None
All parts	0.4 nozzle, 0.2 layers, 3 walls, 4 top/bottom, 15-20% gyroid	-
Colours	Black + white + gold on the logo part: AMS/MMU or manual swaps	-

ASSEMBLY

1. Remove the channel supports from the sleeve through its open end.
2. Slide the drawer in until the end cap meets the sleeve. 0.4 mm clearance all round gives a light friction fit.
3. Click the barrels into the clip ribs; spare flights slide under the rails.

BUILT-IN DETAILS

- Underside: "AIM FOR 180. HIT 26." debossed in the shop typeface.
- Spare flight pocket under the darts for a pack of club flights.
- Flush 3-colour club logo, no glow.

Unless stated: general tolerance +/-0.3 mm (FDM). Do not scale. Black PETG or PLA. Draft for review, not yet test printed.